TECHNICAL CHARACTERISTICS

wineo 400

Heterogeneous resilient-flooring for glueless installation - Covering type according to EN ISO 10582

	wineo 400 wood	**wineo 400** wood XL	**wineo 400** stone
Format	1212 x 187 mm	1507 x 235 mm	600 x 316 mm
Product thickness	4.5 mm	4.5 mm	4.5 mm
Planks, tiles / m² per box	10 / 2.27 m²	6 / 2.12 m²	12 / 2.28 m²
Boxes / m² per pallet	48 / 108,96 m²	52 / 110,24 m²	48 / 109.44 m²
Guarantee	15 years – Guarantee for private use according to Windmöller warranty conditions – www.wineo.de		

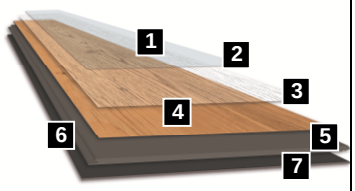

Classification			Product composition	
	Utilization class 23 EN ISO 10874	Heavy-duty use in the domestic area	1	**Surface sealing**
	Utilization class 31 EN ISO 10874	Medium use in the commercial sector	2	**Surface texture** Various embossings
	Wear layer binder content EN ISO 10582	Type I	3	**Wear layer** Thickness 0.3 mm
R9	Anti slip category DIN 51130	R 9	4	**Decor** Decor film
	Staining and chemical resistance EN ISO 26987	Good resistance according to the concentration and residence time	5	**Base layer** with glass fibre reinforced
	Light fastness EN ISO 105-B02	Light fastness (method 2) ≥ 6	6	**Profile connection** Connect technology
	Residual indentation EN ISO 24343-1	≤ 0.1 mm	7	**Backing**
	Thermal resistance EN 12667	0.012 (m²K)/W without insulation mat 0,022 (m²K)/W with insulation mat silentCOMFORT		**Insulation mat** silentCOMFORT (seperately available)
silent COMFORT	Impact sound reduction EN ISO 16251-1	~ 7 dB up to 14 dB in combination with silentCOMFORT		wood – bevelled edge wood XL – registered embossed surface, bevelled edge stone – real joint
	Disposal	Private: Possible with normal domestic refuse Commercial: Refuse-key-no. AVV 170203		

CE
- 18 -

Windmöller GmbH
Nord-West-Ring 21
D-32832 Augustdorf

DOP: 0301010
EN 14041:2004 / AC2006
1658

B_{fl}-s1 | DS | E1 HCHO | ≤ 2 kV | ≥ 0,15 W/(mK)

www.wineo.de

ÉMISSIONS DANS L'AIR INTÉRIEUR
A+ (A+ A B C)

Information representative des emissions dans l'air interieur des substances volatiles presentant un risque de toxicite par inhalation, sur une echelle de classe allant de C (fortes emissions) a A+ (tres faibles emissions)

TÜV PROFI CERT product
70 710 4061-6
www.proficert.com
tested for emissions, harmful substances
PREMIUM

factory made coated

Phthalat frei 100 % Phthalate free

Relevant information:

- Underfloor heating: Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27° C.
- Cleaning and care: see separate cleaning & care instruction.
- Technical subjects can be changed by Windmöller GmbH.