




Motion-Star®

Bewegungsfugenprofil

- für vollflächig verklebte Bodenbeläge mit Stärken von 3 mm, 4,5 mm, 6 mm und 12,5 mm
- patentiertes Profil mit wartungsfreier Bewegungsfuge in beide Richtungen, bei markierter Ausgangsstellung
- dezentes, zweiteiliges Dehnfugenprofil in Aluminium
- in gestanzter (Doppel-K) und in versenkt gebohrter Ausführung erhältlich
- barrierefreie Verlegung (rollstuhlgeeignet)


Movement Joint Profile

- for glued floor coverings with flooring thicknesses of 3 mm, 4.5 mm, 6 mm and 12.5 mm
- patented profile with maintenance-free movement joint to both sides, if it is installed in the marking position
- discreet, 2-part expansion joint profile made of aluminium
- can be supplied in a punched (Double-K) as well as in countersunk drilled version
- barrier-free installation (wheelchair accessible)

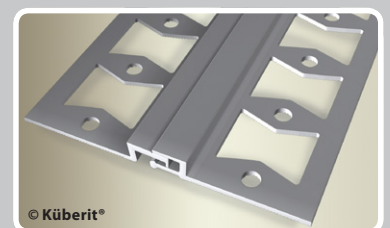





* nur in Aluminium F2 + F4 lieferbar - only available in aluminium F2 + F4

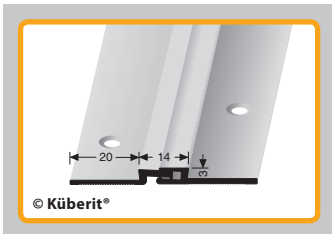


317 V/G
⇄ 3 mm

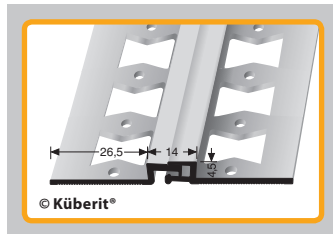


318 G
⇄ 4,5 mm

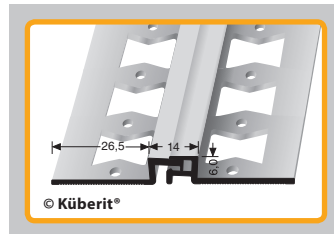

319 G
⇄ 6 mm

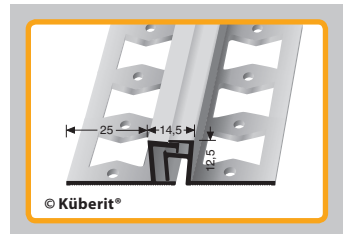

323 G*
⇄ 12,5 mm

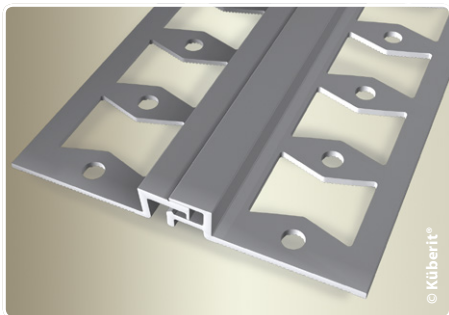

ALUMINIUM ELOXIERT · ALUMINIUM ANODIZED

- | | | | | |
|--|-------------------------------|---------------------------|-------------------------------|---------------------------|
| | | | | |
| F2
edelstahloptik
stainless steel optic | F4
silber
silver | F5
gold
gold | F6
bronze
bronze | F9
sand
sand |

