


## DOP 1020-110204 (AB) 1020-110208 (VL)

Fabrieksmethode Mode de fabrication Herstellungsverfahren Manufacturing process	Getuft, 1/10" lussenpool Tufté, 1/10" velours bouclé Getuftet, 1/10" Schlinge Tufted, 1/10" loop pile				
Samenstelling van de pool Composition du velours Nutzschicht Pile composition	100 % zuivere scheerwol 100 % laine vierge 100 % reine Schurwolle 100 % pure new wool				
Tuftdoek Support Trägergewebe Primary backing	100 % PP				
Rug Dossier Rücken Secondary backing	Vlies Feutre Vliesrücken Fleece	Actionback	110 4 + 5 m	Licht Beige Beige Clair Hell.Beige Light Beige	145 4 + 5 m d. grijs gris foncé D. Grau Dark grey
Poolhoogte Hauteur du velours Polhöhe Pile height	5 mm	5 mm	202 4 + 5 m	Wit Blanc Weiss White	105 4 + 5 m Shell Shell Shell Shell
Totale hoogte Hauteur totale Gesamthöhe Total height	8,5 mm	7,5 mm	549 4 + 5 m	Steen Pierre Stein Stone	907 4 + 5 m Berk Bouleau Birke Birch
Aantal noppen Nombre de points Noppenzahl Tuft density	115 000/m <sup>2</sup>	115 000/m <sup>2</sup>	942 4 + 5 m	Schors Ecorce Rinde Husk	
Poolgewicht Poids du velours Polgewicht Pile weight	730 g/m <sup>2</sup>	730 g/m <sup>2</sup>			
Totaal gewicht Poids total Gesamtgewicht Total weight	2 000 g/m <sup>2</sup>	1 800 g/m <sup>2</sup>			
Warmte isolatie Résistance à la conductibilité de chaleur Wärmedurchlasswiderstand Resistance of heat conduction	ISO 8302 0,16 m <sup>2</sup> K/W (theoretisch)	ISO 8302 0,14 m <sup>2</sup> K/W (theoretisch)	Tog rating 1.6 (F) - 1.4 (AB)		
Gebruik Utilisation Verwendungsbereich Suitability	Huishoudelijk : normaal gebruik Usage d'habitation normale Wohnen : mittlere Beanspruchung Domestic : medium duty				

Bij verlijming : enkel gebruik van EC1-lijmen ! / En cas de pose collée : seulement utilisation des colles EC1 !  
Bei geklebter Verlegung : nur EC1-Klebstoffe verwenden ! / In case of adhesion : only use of EC1 glues !

We reserve the right to modify the characteristics of this product for quality improvement.

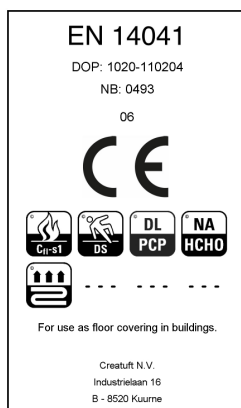

Actionbac



Vlies/Feutre/Fleece

